



**Temposonics**


AN AMPHENOL COMPANY

## Data Sheet

# MH-Series SAFETY CANBus

Magnetostrictive Linear Position Sensors

- Stroke length up to 5000 mm
- Linearity < 0.04 % F.S. / Resolution 0.1 mm
- High reliability due to EMC, shock & vibration resistance
- Suitable for Safety Integrity Level 2 (SIL-2) applications

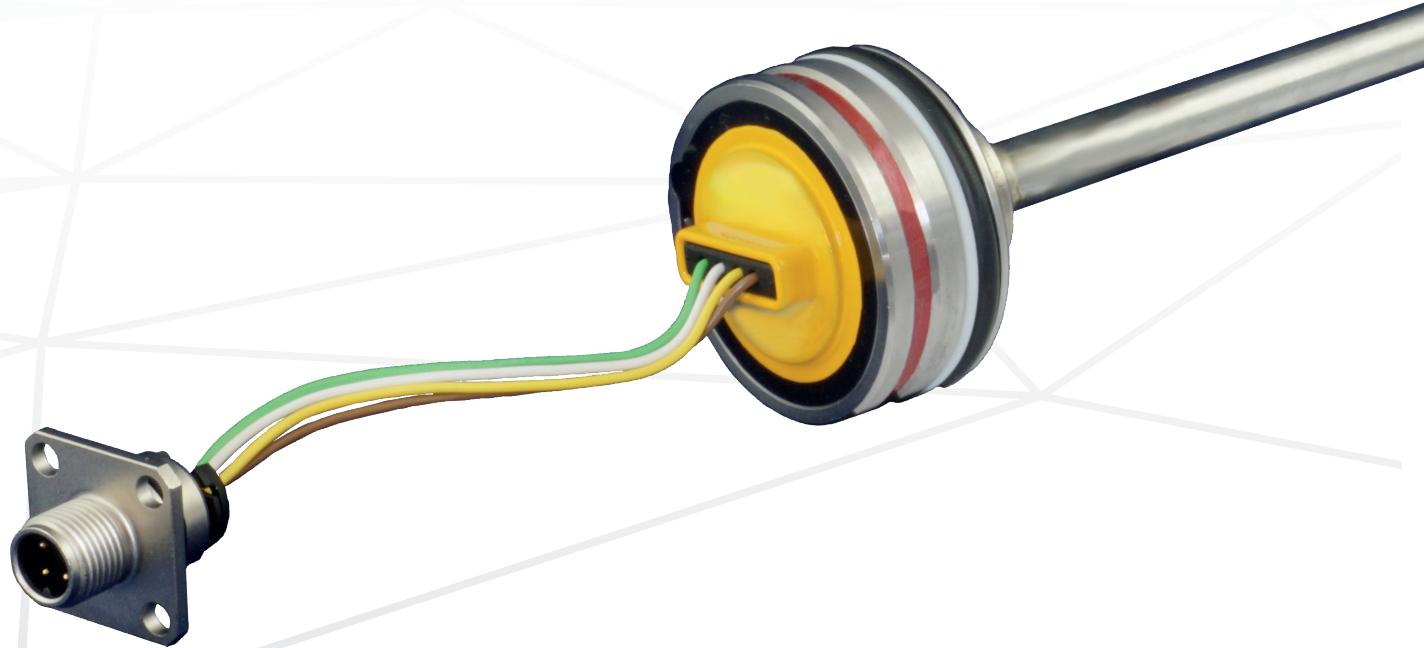

Americas & APAC

## MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Temposonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Temposonics® position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the beginning of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

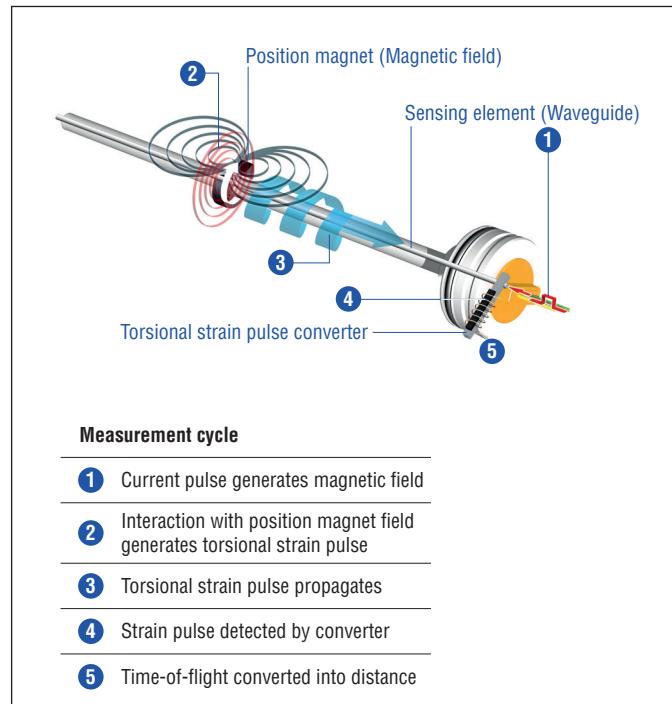


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

## MH SAFETY SENSOR

The Temposonics® MH SAFETY sensors are designed for safety functions requiring direct stroke measurement in hydraulic cylinders. Suitable for functional safety applications in off-highway machinery, the MH SAFETY sensor is engineered to withstand vibration, shock, dust, weathering, and electromagnetic interference. Available with CANopen Safety and J1939-76 outputs, the MH SAFETY sensor is ideal for critical automation and control on aerial work platforms, emergency vehicles, man-lifts, machine stabilizers, and more.

## SAFETY OUTPUT OPTIONS

The CANopen Safety and J1939-76 outputs can be used in applications up to SIL2 and Performance Level d for the safety function "Measurement of position & velocity". The MH SAFETY CANBus has been certified according to IEC 61508:2010 and ISO 13849-1:2015. For further details around the safety function of this product please consult the safety manual (552177).

### NOTICE

For further details, please consult the Safety Manual ([document part no. 552177](#))



Fig. 2: Typical applications

## TECHNICAL DATA


Output					
Bus-protocol	J1939-76 and CANopen Protocol DS-301, DS-304 CANopen Safety protocol, device profile DS-406				
Measured value	Position and velocity				
Measurement parameters					
Stroke length	50...5000 mm				
Resolution (position)	0.1 mm				
Resolution (velocity)	1 mm/s				
Boot up Time	400 ms (typical)				
Cycle Time	Programmable (CANopen Safety: 25 ms default; J1939-76: 20 ms default)				
Linearity	0050...0250 mm	0255...2000 mm	2005...5000 mm		
	≤ ±0.1 mm	±0.04 % (F.S.)	≤ ±0.8 mm		
Internal sample rate	2 ms				
Setpoint tolerance	±1 mm or ±0.04 % F.S. (whatever is greater)				
Operating conditions					
Operating temperature electronics	-40...+105 °C				
Humidity	90 % relative humidity, no condensation, EN 60068-2-30				
Ingress protection - Connector	M12 connector system: IP67/IP69K (connectors correctly fitted), EN 60529 DT connector system: IP69K, EN 60529				
Ingress protection – Sensor housing	IP67, EN 60529				
Shock test	100 g (6 ms) single shock per axis, IEC 60068-2-27 50 g (11 ms) at 1000 shocks per axis, IEC 60068-2-27				
Vibration	Operational sine vibration test IEC 60068-2-6: 25 g (5...2000 Hz) Survival random vibration test IEC 60068-2-64: 15 g RMS (20...2000 Hz) 12 h per axis				
EMC	Compliant with: ISO 13766-1: 2018 Earth-moving and building construction machinery ISO 13766-2: 2018 Part 2: Additional EMC requirements for functional safety ISO 16750-2:2012 Road vehicles The MH sensors fulfill the requirements of the EMC directives 2014/30/EU, UKSI 2016 No. 1091 and TR CU 020/2011				
EMI	200 V/m (200...2000 MHz), ISO 11452-2: 2019 200 mA (20...200 MHz), ISO 11452-4: 2011				
Operating pressure ratings		Pressure (according to DIN EN ISO 19879)*			
PN (nominal operating)	350 bar				
Pmax (max. overload)	450 bar				
Pstatic (proof pressure)	625 bar				
Design/Material					
Sensor electronics housing	Stainless steel 1.4305 (AISI 303)				
Sealing	O-ring: H-NBR 70				
Sensor rod	Stainless steel 1.4306 (AISI 304L)				
RoHS compliance	The used materials are compliant with the requirements of EU Directive 2011/65/EU and EU Regulation 2015/863 as well as UKSI 2022 No. 622 with amendments				
Electrical installation					
Connection type	M12 connector or DT connector system				
Operating voltage	12/24 VDC nominal (8...32 VDC)				
Max Inrush current	1.5 A/2 ms (1.0 A/2 ms if supply < 13 V)				
Supply voltage ripple	< 10 V <sub>pp</sub>				
Power drain	< 1.5 W				
Bus termination (HI-LO)	120 Ω				
Over voltage protection (GND-VDC)	Up to +200 VDC				
Polarity protection (GND-VDC)	Up to -600 VDC				
Insulation Resistance	R ≥ 10 MΩ @ 60 sec				
Electric strength	500 VDC (DC GND to chassis GND)				

\* / According to calculations under use of the FKM guideline


Cycles	Ø 10 mm sensor rod
Dynamic pressure: < 2 × 10 <sup>6</sup> pressure cycles	350 bar
Static pressure: < 2 × 10 <sup>4</sup> pressure cycles	450 bar
Proof pressure: Maximum 5 minutes testing time for cylinder pressure test	625 bar

## TECHNICAL DRAWING

**MH-C – Rod: Ø 10 mm/Dead zone: 63.5 mm/Stroke length: 50...5000 mm**

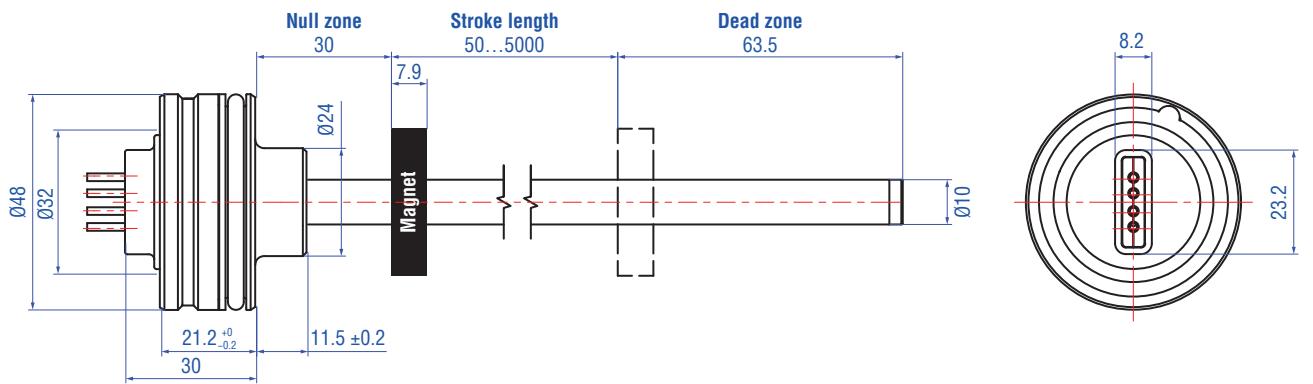

**MH-L – Rod: Ø 10 mm + end plug with female M6 thread/Dead zone: 69.5 mm/Stroke length: 50...5000 mm**

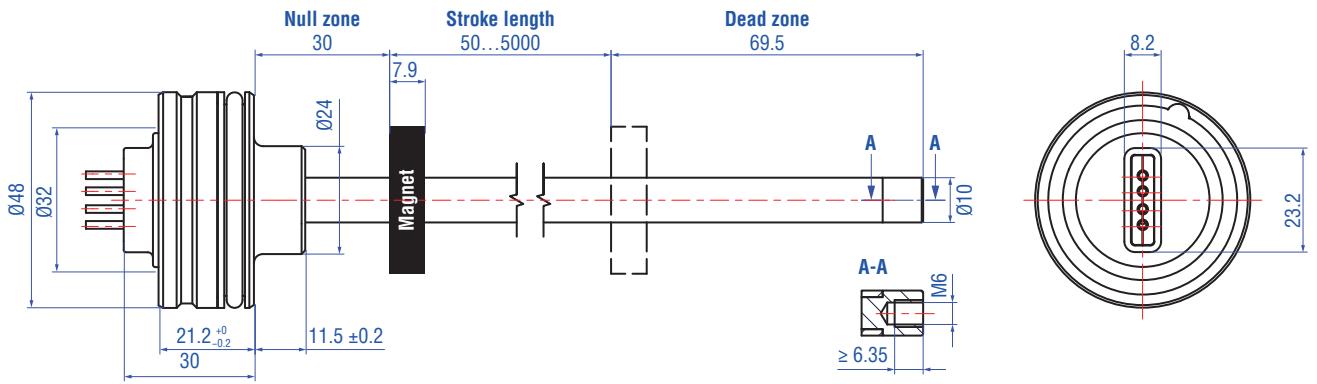

Controlling design dimensions are in millimeters

Fig. 3: Temposonics® MH SAFETY with ring magnet, part 1


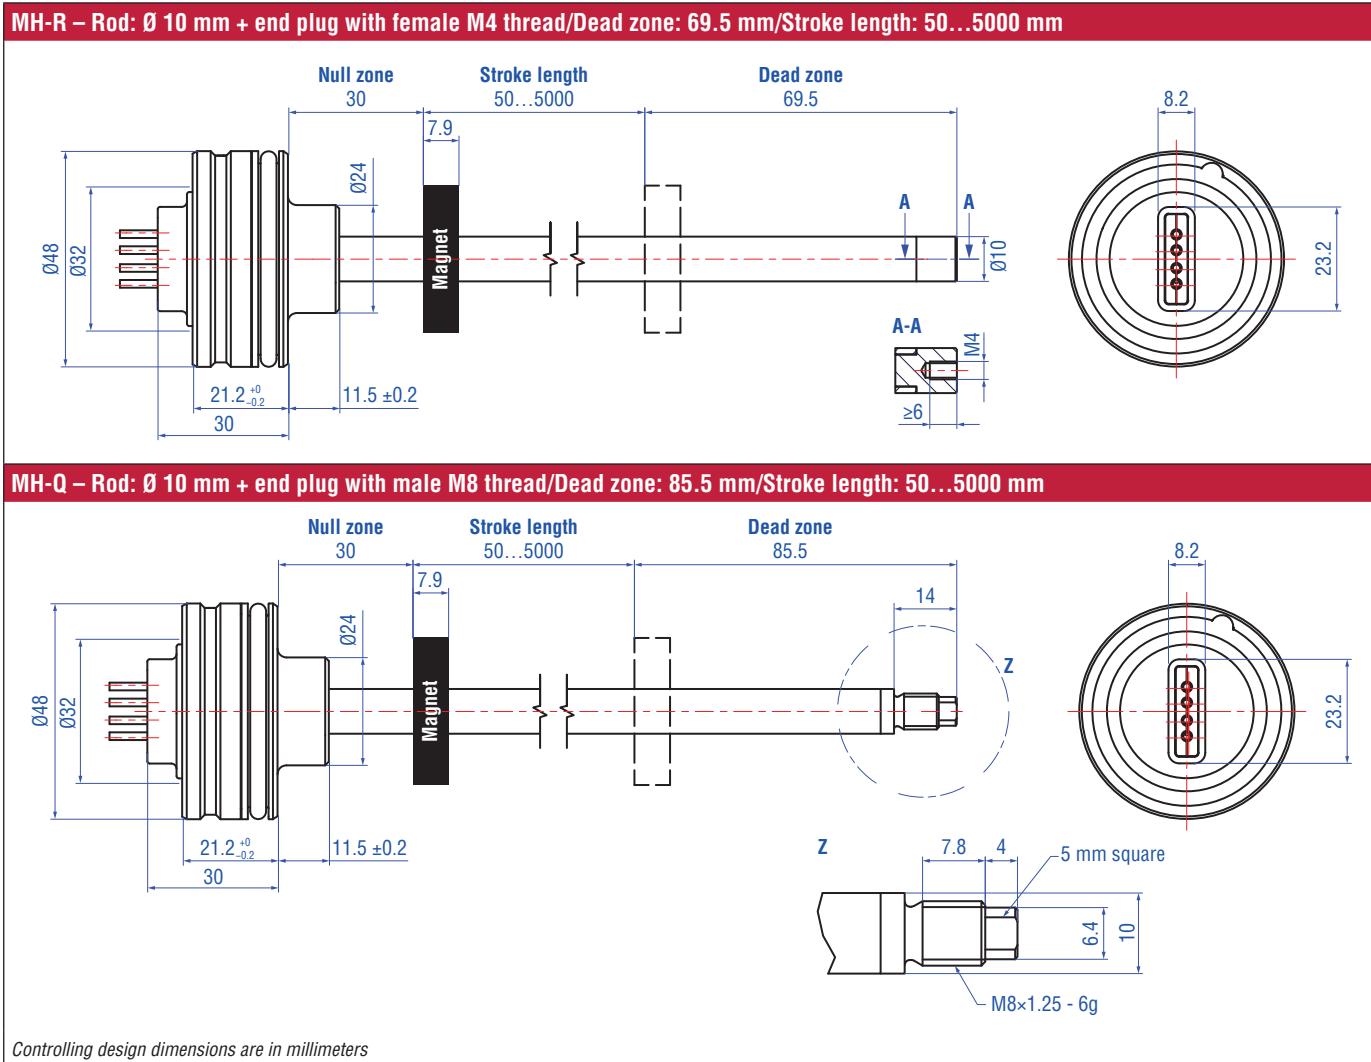


Fig. 4: Tempsonics® MH SAFETY with ring magnet, part 2


## CONNECTOR WIRING

### (1) DT connector system (A...S) & (2) Interconnect without DT connector system (W...S)

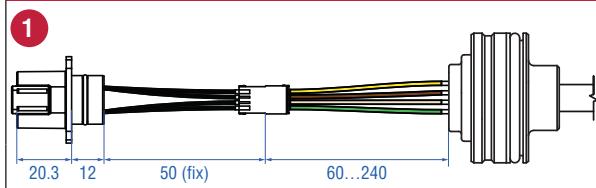

- Single lead wires 0.22 mm<sup>2</sup>
- 4 pin DT style connector
- Toolless Assembly
- Sealing IP69K (with or without mating connector)


#### Connector wiring



View on connector

Pin	Wire	Function
1	BN	VDC
2	GN	CAN_L
3	WH	GND
4	YE	CAN_H

### (1) M12 connector system with flange (N...F) & (2) without flange (K...F)

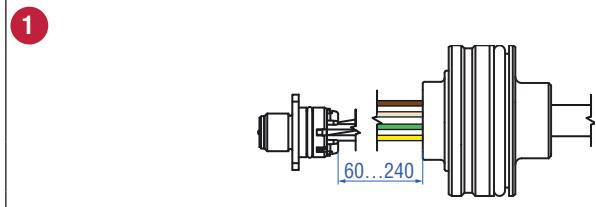

- Single lead wires 0.22 mm<sup>2</sup>
- Attached A-coded M12 connector
- Toolless Assembly
- Sealing IP67, up to IP69K with mating connector


#### Connector wiring




View on connector

Pin	Wire	Function
1	-	-
2	BN	VDC
3	WH	GND
4	YE	CAN_H
5	GN	CAN_L


Fig. 5: Connector wiring

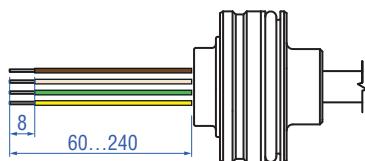**Single wires pigtail (N...A)**


- Single lead wires  $0.5 \text{ mm}^2$
- Insulation PVC

**Connector wiring**

Wire	Function
BN	VDC
WH	GND
GN	CAN_L
YE	CAN_H

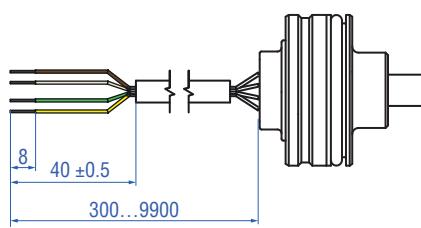**Pigtail cable (T...A)**

- PUR cable, black
- $\varnothing 5 \text{ mm}$ , non-shielded,  $4 \times 0.5 \text{ mm}^2$
- Flexible, oil resistance

**Connector wiring**

Wire	Function
BN	VDC
WH	GND
GN	CAN_L
YE	CAN_H

Fig. 6: Connector wiring

## Connection schematics

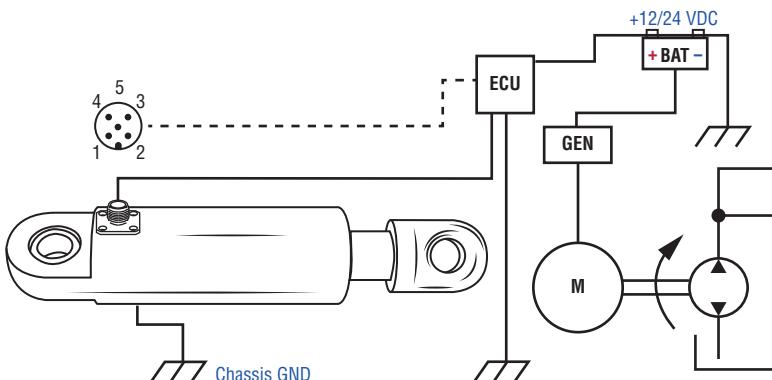


Fig. 7: Connection schematics

## MECHANICAL INSTALLATION

## Installation in a hydraulic cylinder

The robust Temposonics® MH sensor is designed for direct stroke measurement in hydraulic cylinders. The Temposonics® MH sensor can be installed from the head side or the rod side of the cylinder depending on the cylinder design.

In both installation methods, the sensor seals the cylinder by using an O-ring and backup ring which is installed on the sensor housing.

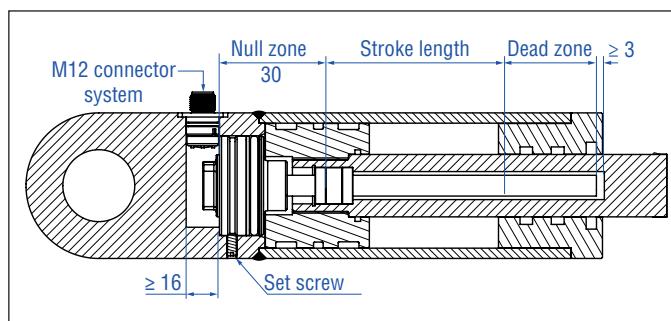


Fig. 8: Example of In-Cylinder assembly with M12 connector system

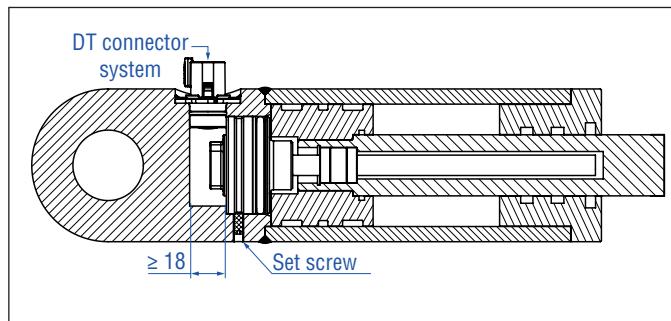


Fig. 9: Example of In-Cylinder assembly with DT connector system

## NOTICE

To ensure proper operation of the sensor, the hydraulic cylinder must be connected to the machine ground. Grounding is often ensured by the mechanical contact between the cylinder and other machine elements. If the cylinder is connected with the machine separately, separate grounding, for example via a grounding strap directly on the cylinder must be ensured.

## NOTICE

## Sealing:

- Take action against water ingress by sealing the cavity on the cover side.
- Cable glands should have IP69K rating.

## Pressure:

- Do not exceed the operating pressure.

## Avoid part collision:

- The bore depth in piston:  
Null zone + stroke length + dead zone + > 3 mm
- The position magnet shall not touch the pressure pipe.
- Note piston rod borehole diameter:  $\geq \varnothing 13$  mm

## Space requirements

## M12 connector system / cable outlet

a	b	c	d	e
52 mm	48H8	> 32.5 mm < 40 mm	21.2 mm	> 16 mm

## DT connector system

a	b	c	d	e
52 mm	48H8	> 32.5 mm < 40 mm	21.2 mm	> 18 mm

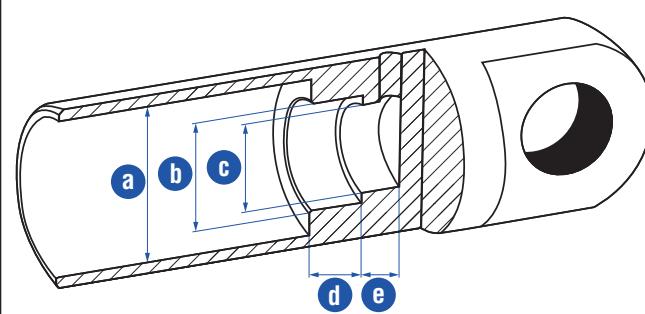


Fig. 10: Space requirements for cylinder

## NOTICE

Installation Manual for MH sensors ([document part no. 551289](#))

Installation Manual for DT connector system  
([document part no. 552093](#))

**Set screw**

e.g. retaining with set screw (with flat point) ISO 4026 M5x10 (DIN 913).

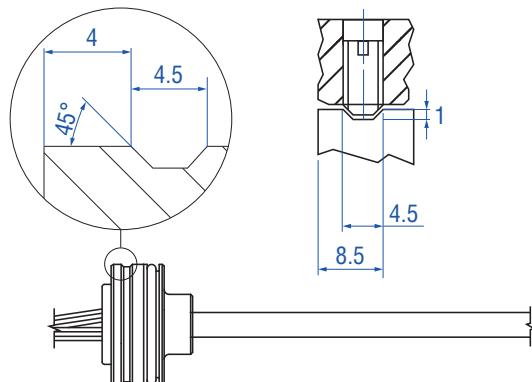
Fastening torque:  $\leq 0.5$  Nm

Fig. 11: Set screw

**NOTICE****Avoid sensor damage:**


- The screw may touch the sensor housing.
- Tightening torque:  $\leq 0.5$  Nm.

**Lock set screw:**

- Lock the set screw against falling out.
- Make sure that the threads are free of oil, grease and dirt.

**Sealing:**

- Consider a seal against water ingress (capillary effect).

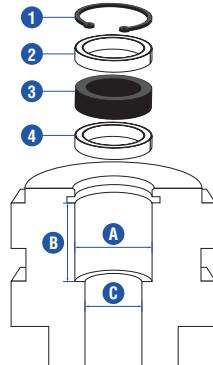**MECHANICAL INSTALLATION – POSITION MAGNET****Magnet installation****1** Circlip**2** Non-magnetic spacer**3** Position magnet**4** Non-magnetic spacer ( $\geq 5$  mm)**Position magnet (Part no.)****401 032****400 533****201 542-2****A** 17.4 mm

25.4 mm

32.8 mm

**B**  $\geq 18$  mm $\geq 18$  mm $\geq 18$  mm**C** Rod Ø 10 mm → Piston rod drilling  $\geq \text{Ø} 13$  mm

Fig. 12: Dimensions for magnet mounting

## ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
M	H	C					M					3						
a	b	c					d					e	f	g	h			

## a | Sensor model

M | H Pressure fit flange

## b | Design

C Rod: Ø 10 mm + flat end plug / Dead zone: 63.5 mm / Stroke length: 50...5000 mm

L Rod: Ø 10 mm + end plug with female M6 thread / Dead zone: 69.5 mm / Stroke length: 50...5000 mm

R Rod: Ø 10 mm + end plug with female M4 thread / Dead zone: 69.5 mm / Stroke length: 50...5000 mm

Q Rod: Ø 10 mm + end plug with male M8 thread / Dead zone: 85.5 mm / Stroke length: 50...5000 mm

## c | Stroke range

X | X | X | X | M 0050...5000 mm (in 5 mm steps)

## d | Electrical wiring

## DT connector system (VDC – GND – HI – LO)

A | | | S 60...240 mm wire length (in 20 mm steps)  
Connector wiring S: 1-3-4-2  
Example Wire Length A60S = 60mm

W | | | S 60...240 mm wire length (in 20 mm steps)  
Connector wiring S: 1-3-4-2  
Example wire length W06S = 60 mm

## M12 connector (VDC – GND – HI – LO) incl. flange

N | | | F 60...240 mm wire length (in 20 mm steps)  
Connector wiring: F: 2-3-4-5  
Example wire length N06F = 60 mm

K | | | F 60...240 mm wire length (in 20 mm steps)  
Connector wiring: F: 2-3-4-5  
Example wire length K06F = 60 mm

## Single wires

N | | | A 60...240 mm wire length (in 20 mm steps)  
Examples wire length N20A = 200 mm

## Cable outlet

T | | | A 300...9900 mm cable length (in 100 mm steps)  
Examples wire length T10A = 1000 mm

## e | Supply voltage

3 +12/24 VDC (8...32 VDC)

## f | Output

S | 0 | 2 CANopen Safety (default cycle time: 25 ms)

J | 9 | 1 J1939-76 (default cycle time: 20 ms)

## g | Baud rate

## CANopen (Safety (S02))

0 1000 kbit/sec

1 800 kbit/sec

2 500 kbit/sec (default setting)

3 250 kbit/sec

4 125 kbit/sec

6 50 kbit/sec

7 20 kbit/sec

8 10 kbit/sec

## J1939-76 (J91)

2 500 kbit/sec (default setting)

3 250 kbit/sec

## h | Node-ID

## CANopen Safety (S02)

| | Hex 01...40

## J1939-76 (J91)

| | Hex 01...FD

## DELIVERY






- Position sensor
- O-ring
- backup-ring
- M12 connector system incl. M12 flange (when option selected)
- DT connector system incl. connector assembly and retainer (when option selected)

Accessories have to be ordered separately


Manuals, Software & 3D models available at:  
[www.temposonics.com](http://www.temposonics.com)

## FREQUENTLY ORDERED ACCESSORIES

### Position magnets

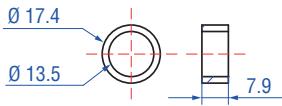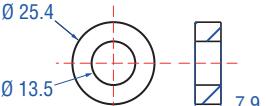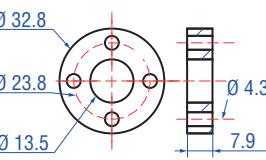		
<b>Ring magnet OD17.4</b> Part no. 401 032	<b>Ring magnet OD25.4</b> Part no. 400 533	<b>Ring magnet OD33</b> Part no. 201 542-2
Material: PA neobond Weight: Approx. 5 g Surface pressure: Max. 20 N/mm <sup>2</sup> Operating temperature: -40...+105 °C (-40...+221 °F)	Material: PA ferrite Weight: Approx. 10 g Surface pressure: Max. 40 N/mm <sup>2</sup> Operating temperature: -40...+120 °C (-40...+248 °F)	Material: PA ferrite GF20 Weight: Approx. 14 g Surface pressure: Max. 40 N/mm <sup>2</sup> Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+120 °C (-40...+248 °F)


### M12 flange

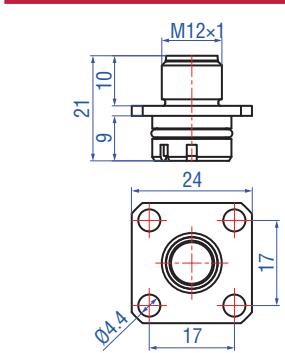

### M12 flange


Part no. 253 769  
Material: Brass, nickel-plated  
Weight: Approx. 5 g  
Operating temperature:  
-40...+105 °C (-40...+221 °F)

### Connector accessories

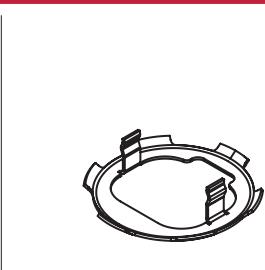

### DT connector system retainer



Part no. 520 101  
Material: 1.4310  
Weight: Ca. 1.7 g  
Operating temperature:  
-40...+105 °C (-40...+221 °F)

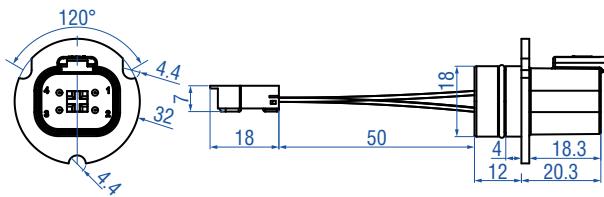

### DT connector assembly

Part no. 255 098  
Material: PA66  
Weight: Approx. 6 g  
Operating temperature:  
-40...+105 °C (-40...+221 °F)

## Cables

	<b>Cable with M12 A-coded female connector (5 pin), straight – pigtail</b> Part no. 370 673	<b>Wiring</b> <table border="1"> <thead> <tr> <th>Wires</th><th>Color</th><th>Pin</th><th>M12 A-coded female connector (5 pin)</th></tr> </thead> <tbody> <tr> <td>BN</td><td>↔</td><td>1</td><td></td></tr> <tr> <td>WH</td><td>↔</td><td>2</td><td></td></tr> <tr> <td>BU</td><td>↔</td><td>3</td><td></td></tr> <tr> <td>BK</td><td>↔</td><td>4</td><td></td></tr> <tr> <td>GY</td><td>↔</td><td>5</td><td></td></tr> </tbody> </table>				Wires	Color	Pin	M12 A-coded female connector (5 pin)	BN	↔	1		WH	↔	2		BU	↔	3		BK	↔	4		GY	↔	5	
Wires	Color	Pin	M12 A-coded female connector (5 pin)																										
BN	↔	1																											
WH	↔	2																											
BU	↔	3																											
BK	↔	4																											
GY	↔	5																											
Material: PUR jacket; black Feature: Shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67 (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)																													
	<b>Cable with M12 A-coded female connector (5 pin), angled – pigtail</b> Part no. 370 675	<b>Wiring</b> <table border="1"> <thead> <tr> <th>Wires</th> <th>Color</th> <th>Pin</th> <th>M12 A-coded female connector (5 pin)</th> </tr> </thead> <tbody> <tr> <td>BN</td> <td>↔</td> <td>1</td> <td></td> </tr> <tr> <td>WH</td> <td>↔</td> <td>2</td> <td></td> </tr> <tr> <td>BU</td> <td>↔</td> <td>3</td> <td></td> </tr> <tr> <td>BK</td> <td>↔</td> <td>4</td> <td></td> </tr> <tr> <td>GY</td> <td>↔</td> <td>5</td> <td></td> </tr> </tbody> </table>				Wires	Color	Pin	M12 A-coded female connector (5 pin)	BN	↔	1		WH	↔	2		BU	↔	3		BK	↔	4		GY	↔	5	
Wires	Color	Pin	M12 A-coded female connector (5 pin)																										
BN	↔	1																											
WH	↔	2																											
BU	↔	3																											
BK	↔	4																											
GY	↔	5																											
Material: PUR jacket; black Feature: Shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67 (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)																													



# Temposonics

AN AMPHENOL COMPANY

**UNITED STATES**  
**Temposonics, LLC** 3001 Sheldon Drive  
Americas & APAC Region Cary, N.C. 27513  
Phone: +1 919 677-0100  
E-mail: info.us@temposonics.com

**GERMANY** Auf dem Schüffel 9  
**Temposonics** 58513 Lüdenscheid  
**GmbH & Co. KG** Phone: +49 2351 9587-0  
EMEA Region & India E-mail: info.de@temposonics.com

**ITALY** Phone: +39 030 988 3819  
Branch Office E-mail: info.it@temposonics.com

**FRANCE** Phone: +33 6 14 060 728  
Branch Office E-mail: info.fr@temposonics.com

**UK** Phone: +44 79 21 83 05 86  
Branch Office E-mail: info.uk@temposonics.com

**SCANDINAVIA** Phone: +46 70 29 91 281  
Branch Office E-mail: info.sca@temposonics.com

**CHINA** Phone: +86 21 3405 7850  
Branch Office E-mail: info.cn@temposonics.com

**JAPAN** Phone: +81 3 6416 1063  
Branch Office E-mail: info.jp@temposonics.com

**Document Part Number:**  
552175 Revision B (EN) 01/2026



## temposonics.com

© 2026 Temposonics, LLC – all rights reserved. Temposonics, LLC and Temposonics GmbH & Co. KG are subsidiaries of Amphenol Corporation. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of Temposonics, LLC or Temposonics GmbH & Co. KG. Detailed trademark ownership information is available at [www.temposonics.com/trademarkownership](http://www.temposonics.com/trademarkownership).