

Data Sheet

Level Plus[®] – Tank SLAYER[®]

Magnetostrictive Liquid Level Transmitters with Temposonics[®] Technology

- 4-IN-1 Measurement
- Inherent Accuracy ± 1 mm
- API Temperature Corrected Volumes
- Hazardous Area Certified



MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Temposonics rely on the company's proprietary Temposonics® magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Temposonics® position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the end of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

Tank Slayer®

The Level Plus® Tank Slayer® liquid level transmitter satisfies the demand for an accurate and robust liquid-level sensor with unsurpassed flexibility to meet most process application conditions. The Tank Slayer® transmitter provides 4-in-1 measurement using one process opening for product level, interface level, temperature and volume measurements. Once the transmitter is installed and calibrated there is no requirement for scheduled maintenance or recalibration for the expected 10 year life of the sensor. **Set it and forget it!**

Standard	Rating
FM 3610 ISA 60079-11:2014	Class I, Div. 1, Groups A, B, C, D T4 Class I, Zone 0, AEx ia IIC T4 Ga Ta= -50 to 71°C: IP65
C22.2 No. 157 C22.2 No. 60079-11:2014	Class I, Div. 1, Groups A, B, C, D T4 Class I, Zone 0, Ex ia IIC T4 Ga Ta= -50 to 71°C: IP65
EN 60079-11:2012	FM14ATEX0068X Ex II 1 G Ex ia IIC T4 Ga Ta= -50 to 71°C: IP65
IEC 60079-11:2011	IECEX FMG 14.0032X Ex ia IIC T4 Ga Ta= -50 to 71°C: IP65
UKSI 2016:1107	FM22UKEX0069X Ex II 1 G Ex ia IIC T4 Ga/Gb Ta = -50 to 71C
FM 3615 ISA 60079-1	Class I, Div. 1, Groups A, B, C, D T6...T3 Class I, Zone 0/1, AEx db IIB+H2 T6...T3 Ga/Gb Ta= -40 to 71°C: IP65
C22.2 No. 30 C22.2 No. 60079-1	Class I, Div. 1, Groups B, C, D T6...T3 Ex db IIB+H2 T6...T3 Ga/Gb Ta= -40 to 71°C: IP65
EN 60079-1:2014	FM16ATEX0068X Ex II ½ G Ex db IIB+H2 T6...T3 Ga/Gb Ta= -40 to 71°C: IP65
IEC 60079-1:2011	IECEX FMG 16.0033X Ex db IIB+H2 T6...T3 Ga/Gb Ta= -40 to 71°C: IP65
UKSI 2016:1107	FM22UKEX0070X Ex II ½ G Ex db IIB+H2 T6...T3 Ga/Gb Ta = -40 to 71C

Fig. 2: Certifications of Tank Slayer® level transmitter

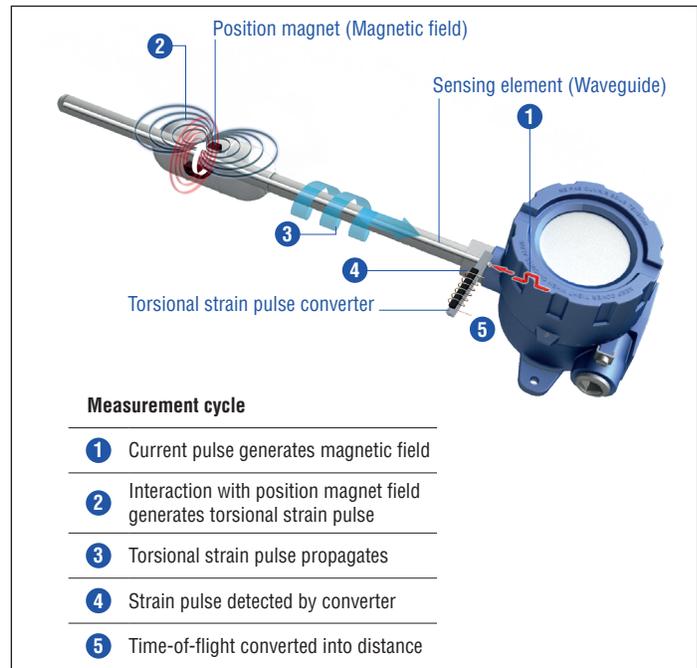


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

Features:

- 4-in-1 Measurement:
 - Product Level
 - Interface Level
 - Temperature
 - Volume
- No scheduled maintenance or recalibration
- Inherent Accuracy $\pm 1\text{mm}$
- Integral Display
- Intrinsically Safe
- Explosion Proof
- 200 Point Strap Table
- API Temperature Corrected Volume

Applications:

- Inventory Control
- Bulk Storage
- Custody Transfer

Industries:

- Petroleum
- LPG Terminals
- Food & Beverage


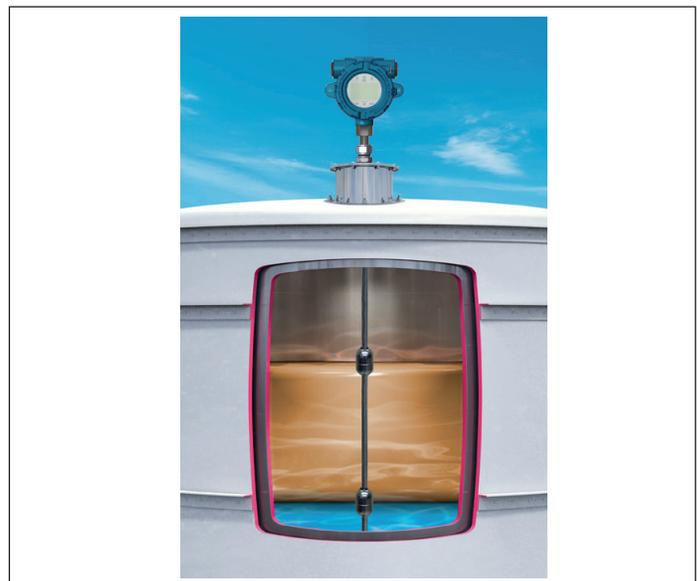


Fig. 3: Example of product and interface level measurement

TECHNICAL DATA

Level output	
Measured variable	Product level and interface level
Output signal/protocol	Modbus RTU, DDA, Analog (4...20 mA), HART®
Order length	1575...22000 mm (62...866 in.) (order length equals the measurement range plus the inactive zone / contact factory for longer lengths)
Inherent accuracy	±1 mm (0.039 in.)
Repeatability	0.001% F.S. or 0.381 mm (0.015 in.) whichever is greater (any direction)
Temperature output	
Measured variable	Average and multipoint temperatures (Modbus, DDA) Single point temperature (Analog, HART®)
Temperature accuracy (Modbus, DDA)	±0.2 °C (0.4 °F) range -40...-20 °C (-40...-4 °F), ±0.1 °C (0.2 °F) range -20...+70 °C (-4...+158 °F), ±0.15 °C (0.3 °F) range +70...+100 °C (+158...+212 °F), ±0.5 °C (0.9 °F) range +100...+105 °C (+ 212 ...221 °F)
Temperature accuracy (Analog, HART®)	±0.28 °C (0.5 °F) range -40...+105 °C (-40...+221 °F)
Electronics	
Input voltage	10.5...28 VDC
Fail safe	High, full scale (Modbus, DDA) Low, 3.5 mA default or High, 22.8 mA (Analog, HART®)
Reverse polarity protection	Series diode
EMC	EN 61326-1, EN 61326-2-3, EN 61326-3-2, EN 61000-6-2, EN 61000-6-3, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11
Environmental	
Enclosure rating	NEMA Type 4X, IP65
Humidity	0...100 % relative humidity, non-condensing
Operating temperatures	Electronics: -40...+71 °C (-40...+160 °F) Sensing element: -40...+125 °C (-40...+257 °F) (contact factory for specific temperature ranges) Temperature element: -40...+105 °C (-40...+221 °F)
Vessel pressure	Flexible Hose: 30 bar (435 psi) For CRN pressure specifications see Operation Manual 551685
Materials	Wetted parts: 316L stainless steel (contact factory for alternative materials) Non-wetted parts: 316L stainless steel, Epoxy coated aluminum
Field installation	
Housing dimensions	Single cavity: 145 mm (5.7 in.) W × by 127 mm (5 in.) D × 109 mm (4.3 in.) H Dual cavity: 117 mm (4.6 in.) W × by 127 mm (5 in.) D × 206 mm (8.1 in.) H Stainless steel single cavity: 178 mm (7.1 in.) W × by 135 mm (5.3 in.) D × 153 mm (6 in.) H NEMA Type 4X: 87 mm (3.4 in.) W × by 124 mm (4.9 in.) D × 132 mm (5.2 in.) H
Mounting	
Flexible hose	1 in. adjustable MNPT or BSPP fitting, flange mount
Wiring	
Connections	4 wire shielded cable or twisted pair, 4570 mm (180 in.) integral cable with pigtail Daniel Woodhead 6 pin male connector
Electrical connections	
Single and dual cavity	¾ in. FNPT conduit opening, M20 for ATEX/IECEX/UKCA version
NEMA Type 4X	½ in. FNPT conduit opening
Display	
Measured variables	Product level, interface level and temperature

TECHNICAL DRAWING

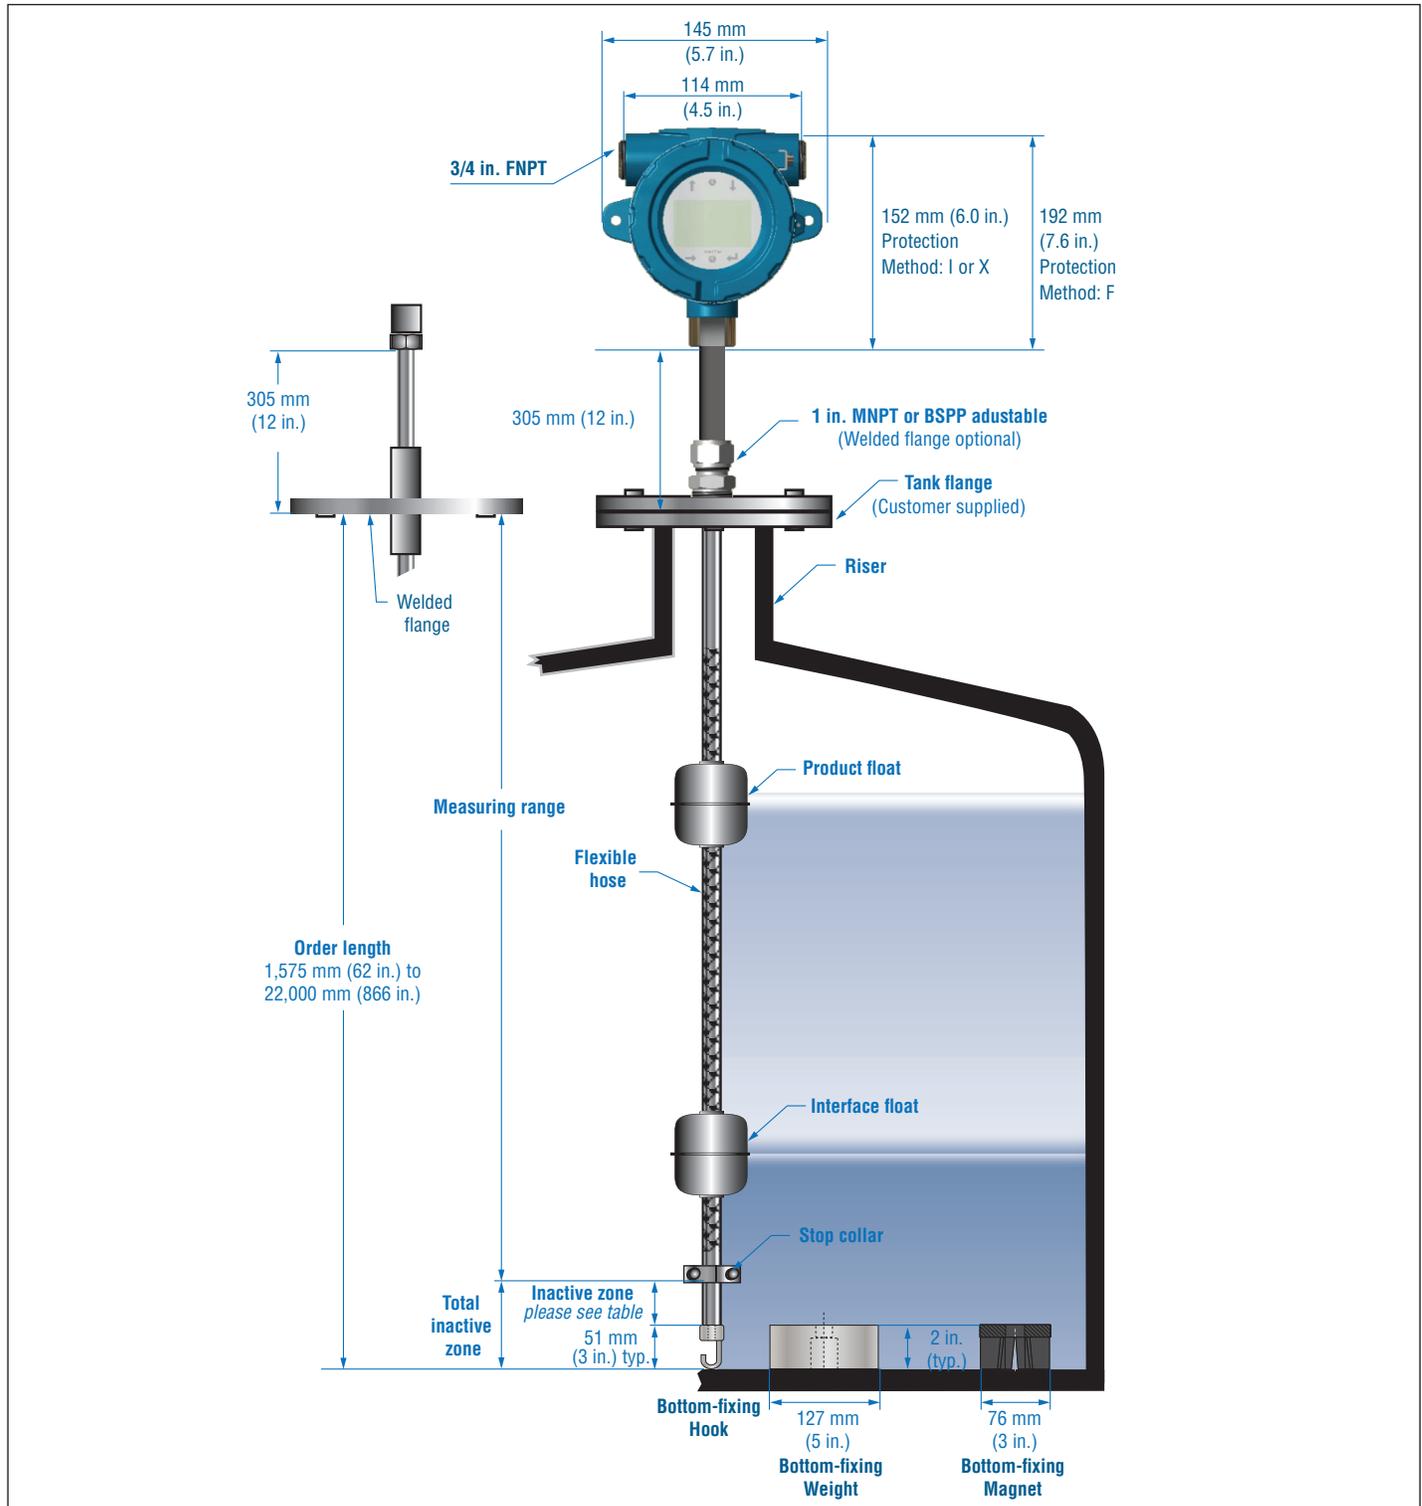

TRANSMITTER INACTIVE ZONE REFERENCE

Order Length	Inactive Zone
<7.6 m (25 ft.)	76 mm (3 in.)
7.6 m to 12.2 m (25 to 40 ft.)	97 mm (3.8 in.)
12.3 m to 22 m (40 to 72 ft.)	120 mm (4.7 in.)

ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
L	P	T																			
a			b	c	d	e	f	g	h	i	j	k	l	m	n	o				p	

a	Sensor model		
L	P	T	Tank Slayer® Level Transmitter

b	Output
M	Modbus
D	DDA
1	1 Loop with HART®
2	2 Loop with HART®
5	1 Loop with HART® and SIL 2
7	2 Loop with HART® and SIL 2 (loop 1 only)

c	Housing type
A	NEMA housing w/cable
B	NEMA housing w/terminal
C	NEMA housing w/connector
D	Single cavity with display
E	Dual cavity with display
L	SS single cavity w/display

d	Electronics mounting
1	Standard

e	Sensor pipe
M	Flexible, 7/8 in. OD tube w/bottom fixing eye
N	Flexible, 7/8 in. OD tube w/bottom fixing weight
P	Flexible, 7/8 in. OD tube w/bottom fixing magnet
S	Flexible, 7/8 in. OD tube w/o bottom fixing hardware

f	Materials of construction (Wetted parts)*
1	316L stainless steel

g	Process connection type
1	NPT adjustable (1 in. only)
2	BSPP adjustable (1 in. only)
6	150 lb. welded RF flange
7	300 lb. welded RF flange
8	600 lb. welded RF flange
A	PN16, DIN 2572 welded flange
B	PN40, DIN 2572 welded flange
C	PN64, DIN 2572 welded flange
D	PN100, DIN 2572 welded flange

h	Process connection size
B	1 in. (NPT or BSPP only)
D	2 in. (DN50)
E	DN65
F	3 in. (DN80)
G	4 in. (DN100)
H	5 in. (DN125)
J	6 in. (DN150)
X	None

i	Number of DT's (Digital Thermometers)
0	None
1	One DT
5	Five DT's (Modbus or DDA)
K	Twelve DT's (Modbus only)
M	Sixteen DT's (Modbus only)

j	DT's placement
F	Evenly spaced per API
C	Custom
X	None

k **l** **m** **n** **o** **p** Continued on next page

*/ Contact factory for other materials

ORDER CODE

k	Notified body
C	CEC (FMC)
E	ATEX
F	NEC (FM)
I	IEC
X	None
B	INMETRO
N	NEPSI
P	CCOE
T	CML/TIIS
U	UKCA
K	KC

l	Protection method
F	Explosionproof/Flame proof (only for housing type D, E, or L)
I	Intrinsically safe
X	No approval

m	Gas group
A	Group A (not available with “C = CEC (FMC)” notified body and “F = Flameproof/Explosion” proof protection method)
B	Group B
C	Group C
D	Group D
3	IIC (Intrinsically Safe only)
4	IIB + H2 (Explosion Proof / Flameproof only)
X	None

n	Unit of measure
M	Millimeters (Metric)
U	Inches (US customary)

o	Length (no decimal spaces)
X X X X X	Flexible sensor pipe: 1575...22000 mm (code as 01575 to 22000)
X X X X X	Flexible sensor pipe: 62...866 in. (code as 06200 to 86600)

p	Special
S	Standard product

NOTICE

Accessories such as floats, cables, and remote displays have to be ordered separately. All accessories are shown in the [Accessories Catalog \(551103\)](#).

FREQUENTLY ORDERED ACCESSORIES – Additional options available in our [Accessories Guide](#) 551103

General Notes

1. Be sure that the float specific gravity is at least 0.05 less than that of the measured liquid as a safety margin at ambient temperature.
2. For interface measurement: A minimum of 0.05 specific gravity differential is required between the upper and lower liquids.
3. When the magnet is not shown, the magnet is positioned at the center line of float.
4. Drawings contained in this document are for reference only. Contact the factory for engineering drawings.

Long-gauge float	Pressure	Temperature	Magnet offset	Specific gravity	Material	Part number
	29.3 bar (425 psi)	149 °C (300 °F)	Yes	0.54	Stainless steel	252 961-2
				0.65	Nickel Alloy C-276	252 961-4
				0.93	Stainless steel	252 962-2
				0.93	Nickel Alloy C-276	252 962-4

Standard floats	Pressure	Temperature	Magnet offset	Specific gravity	Material	Part number
	22.4 bar (325 psi)	149 °C (300 °F)	No	0.66	Stainless steel	201 232-2
				0.70	Nickel Alloy C-276	201 232-4

Controlling design dimensions are in millimeters and measurements in () are in inches

UNITED STATES
Temposonics, LLC
Americas & APAC Region
3001 Sheldon Drive
Cary, N.C. 27513
Phone: +1 919 677-0100
E-mail: info.us@temposonics.com

GERMANY
Temposonics
GmbH & Co. KG
EMEA Region & India
Auf dem Schüffel 9
58513 Lüdenscheid
Phone: +49 2351 9587-0
E-mail: info.de@temposonics.com

ITALY
Branch Office
Phone: +39 030 988 3819
E-mail: info.it@temposonics.com

FRANCE
Branch Office
Phone: +33 6 14 060 728
E-mail: info.fr@temposonics.com

UK
Branch Office
Phone: +44 79 44 15 03 00
E-mail: info.uk@temposonics.com

SCANDINAVIA
Branch Office
Phone: +46 70 29 91 281
E-mail: info.sca@temposonics.com

CHINA
Branch Office
Phone: +86 21 2415 1000 / 2415 1001
E-mail: info.cn@temposonics.com

JAPAN
Branch Office
Phone: +81 3 6416 1063
E-mail: info.jp@temposonics.com

Document Part Number:
551688 Revision H (EN) 01/2023



temposonics.com